



A quality flush mount access panel cover for a 6x6 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 6x6 inches open area.

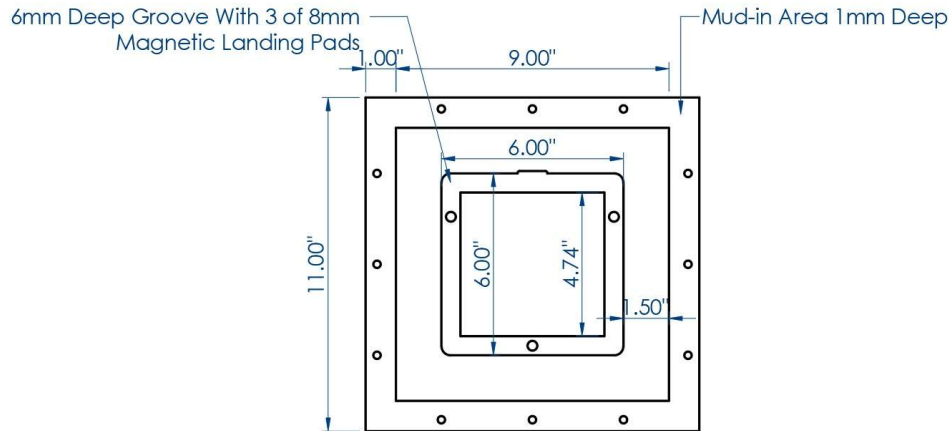

Product Dimensions

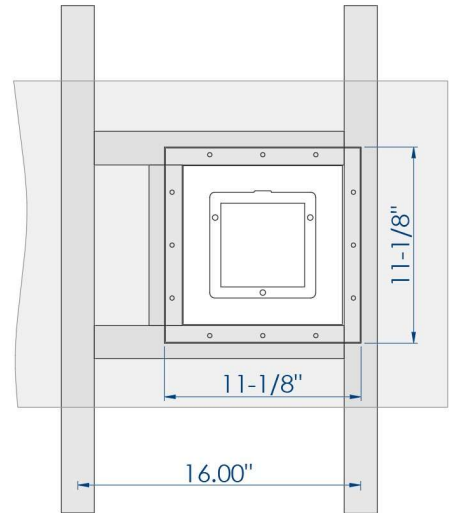

Suggested Drywall Opening

General dimensional data: A=6"; B= A-5/8"-5/8"; C=A+3"; D=A+5"

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seem as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 6"x6" open area and 4.74x4.74" access-able
- Overall dimensions are 11" x 11" x 1/2" (279mm x 279mm x 12mm)
- Product weight is 1.07lbs (0.48Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRC panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for an 8x8 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides an 8x8 inches open area.

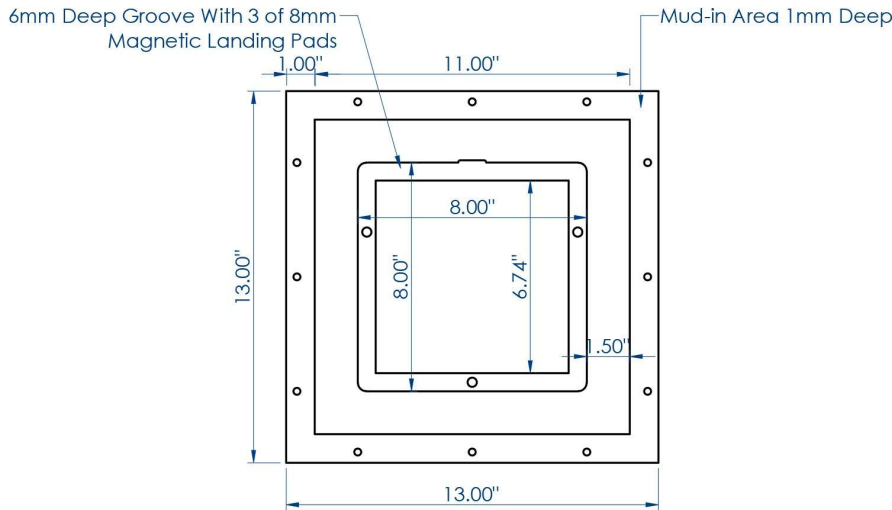

Product Dimensions

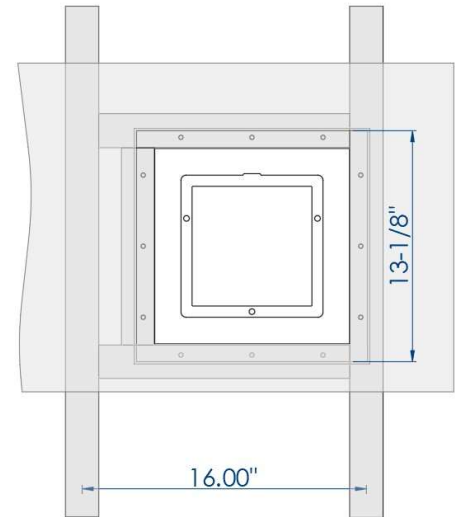

Suggested Drywall Opening

General dimensional data: A=8"; B= A-5/8"-5/8"; C=A+3"; D=A+5"

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seam as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 8"x8" open area and 6.74x6.74" access-able
- Overall dimensions are 13" x 13" x 1/2" (330mm x 330mm x 12mm)
- Product weight is 1.43lbs (0.65Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRC panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for a 10x10 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 10x10 inches open area.

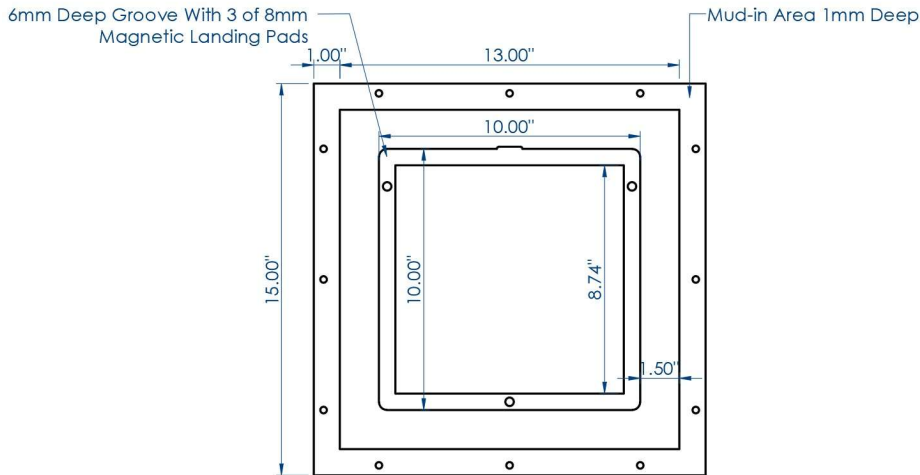

Product Dimensions

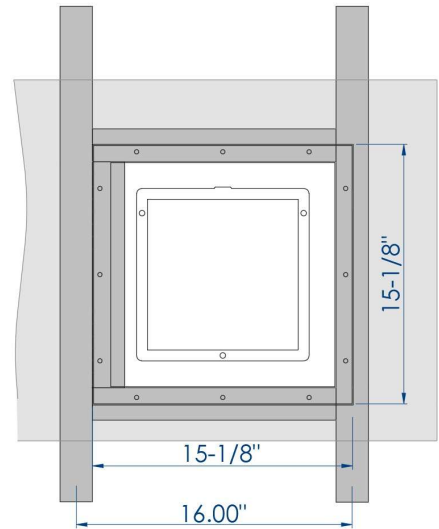

Suggested Drywall Opening

General dimensional data: A=10"; B= A-5/8"-5/8"; C=A+3"; D=A+5"

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seem as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 10"x10" open area and 8.74"x8.74" access-able
- Overall dimensions are 15" x 15" x 1/2" (381 mm x 381 mm x 12mm)
- Product weight is 1.78lbs (0.80Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRC panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for a 12x12 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 12x12 inches open area.

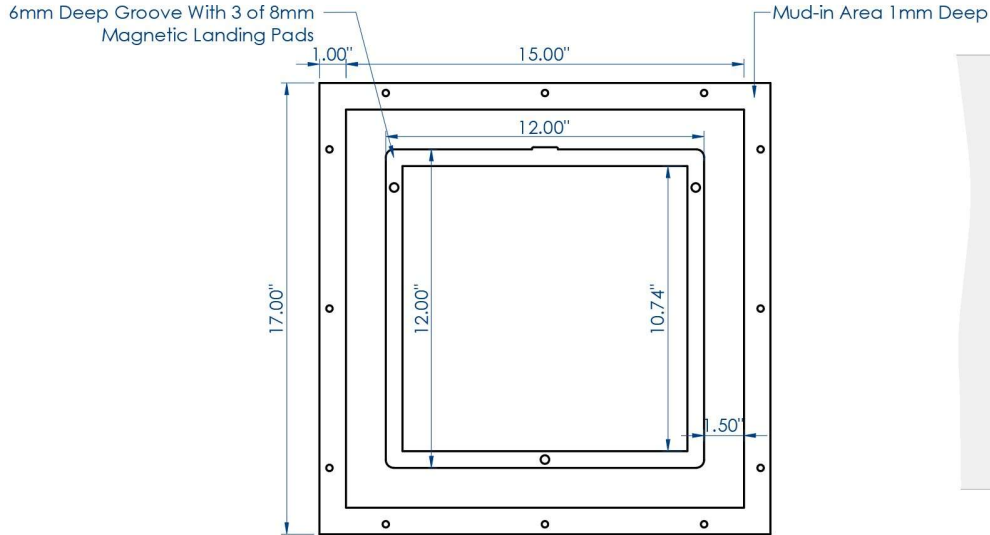

Product Dimensions

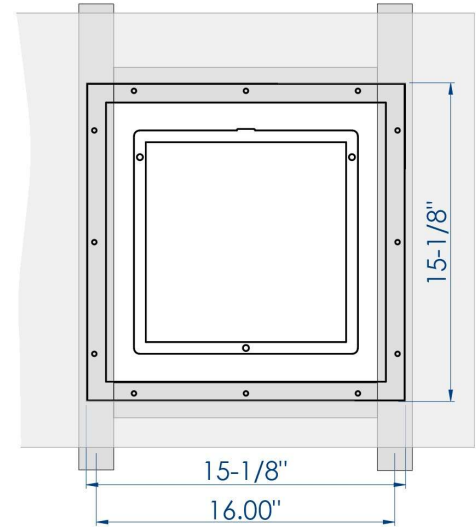

Suggested Drywall Opening

General dimensional data: $A=12"$; $B=A-5/8"-5/8"$; $C=A+3"$; $D=A+5"$

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seam as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 12"x12" open area and 10.74"x10.74" access-able
- Overall dimensions are 17" x 17" x 1/2" (432mm x 432mm x 12mm)
- Product weight is 2.40lbs (1.08Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRC panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for a 14x14 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 14x14 inches open area.

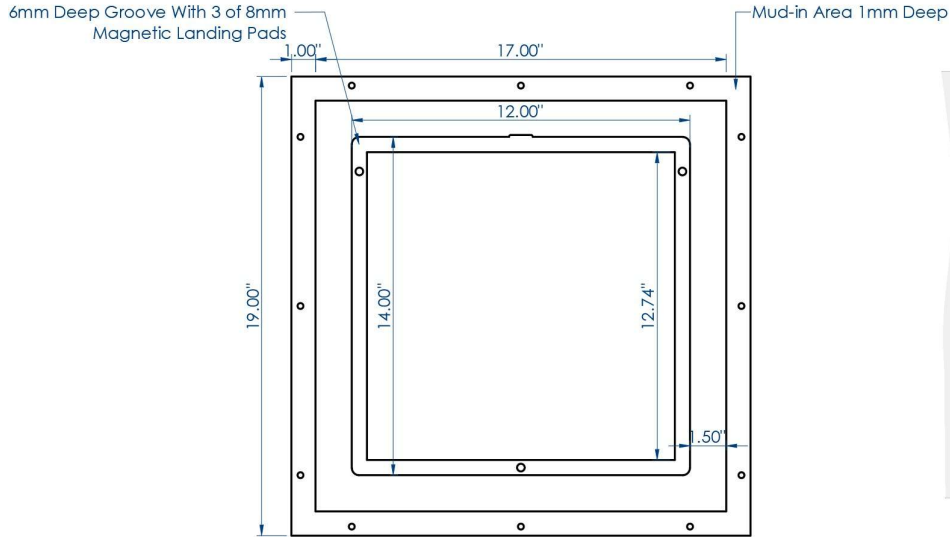

Product Dimensions

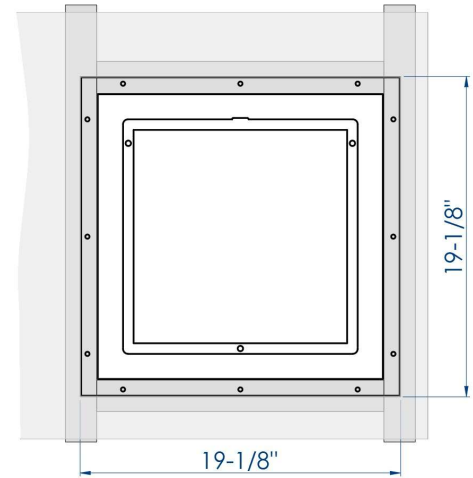

Suggested Drywall Opening

General dimensional data: A=14"; B= A-5/8"-5/8"; C=A+3"; D=A+5"

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seem as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 14"x14" open area and 12.74"x12.74" access-able
- Overall dimensions are 19" x 19" x 1/2" (482mm x 482mm x 12mm)
- Product weight is 2.80lbs (1.27Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRc panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for a 16x16 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 16x16 inches open area.

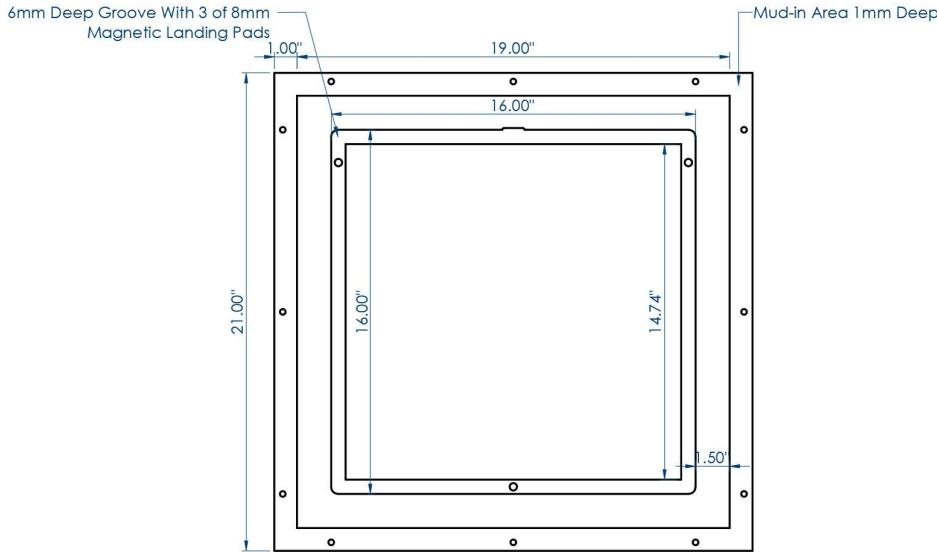

Product Dimensions

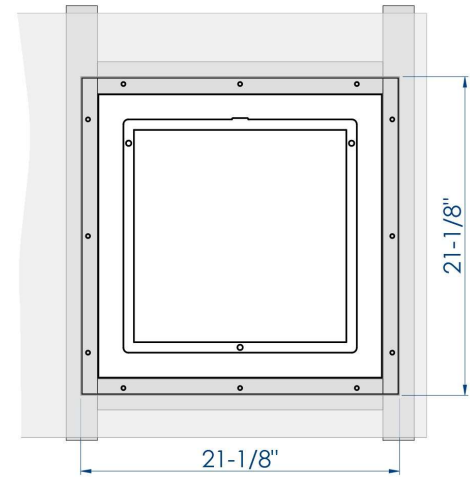

Suggested Drywall Opening

General dimensional data: $A=16"$; $B= A-5/8"-5/8"$; $C=A+3"$; $D=A+5"$

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seam as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 16"x16" open area and 14.74"x14.74" access-able
- Overall dimensions are 21" x 21" x 1/2" (533mm x 533mm x 12mm)
- Product weight is 3.20lbs (1.45Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRP panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for a 18x18 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 18x18 inches open area.

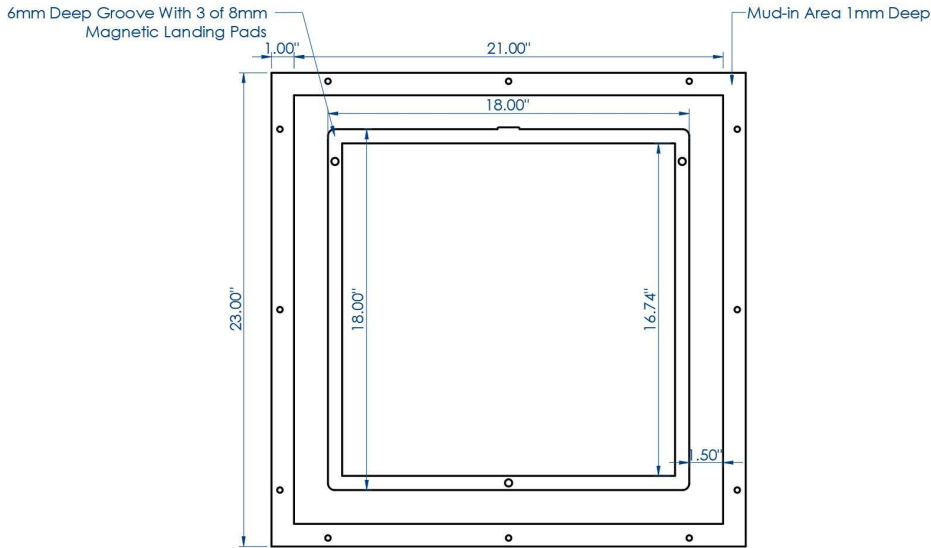

Product Dimensions

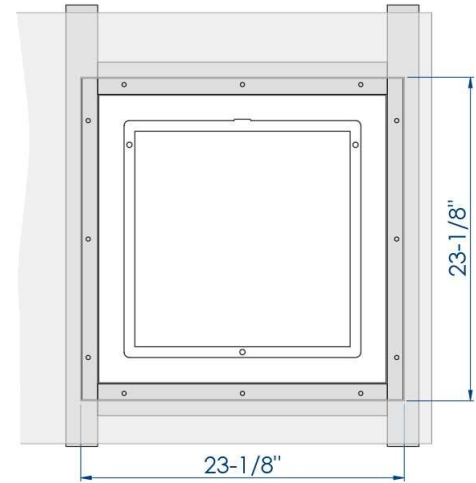

Suggested Drywall Opening

General dimensional data: A=18"; B= A-5/8"-5/8"; C=A+3"; D=A+5"

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seam as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 18"x18" open area and 16.74"x16.74" access-able
- Overall dimensions are 23" x 23" x 1/2" (584mm x 584mm x 12mm)
- Product weight is 3.60lbs (1.63Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRG panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for a 20x20 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 20x20 inches open area.

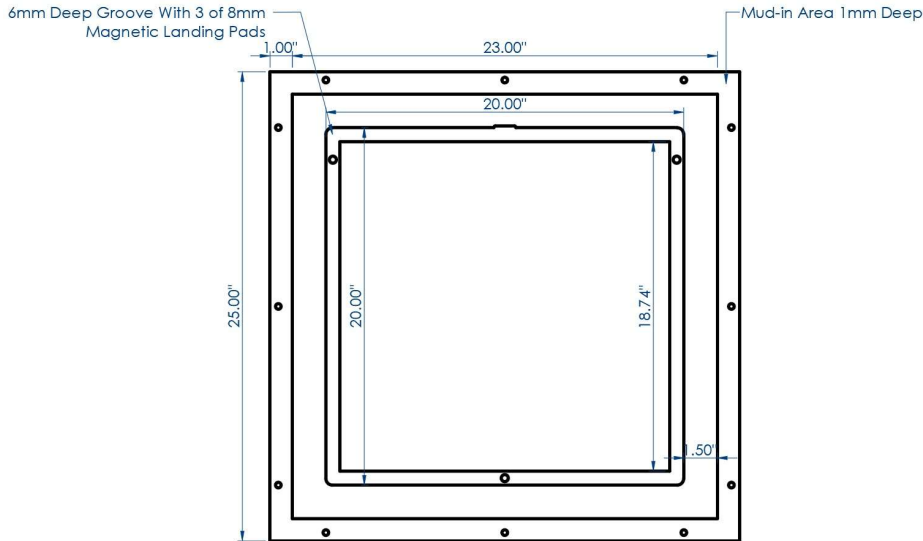

Product Dimensions

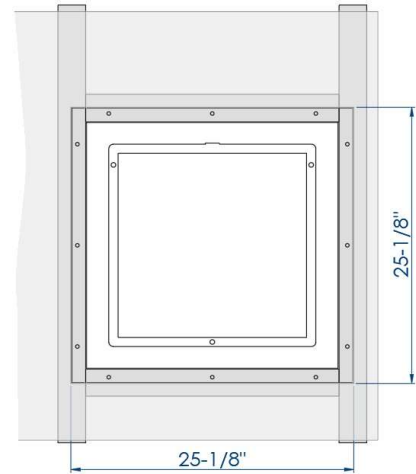

Suggested Drywall Opening

General dimensional data: $A=20"$; $B= A-5/8"-5/8"$; $C=A+3"$; $D=A+5"$

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seam as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers


PRODUCT SPECIFICATIONS

- 20"x20" open area and 18.74"x18.74" access-able
- Overall dimensions are 25" x 25" x 1/2" (635mm x 635mm x 12mm)
- Product weight is 4.00lbs (1.81Kg)


MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRP panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

A quality flush mount access panel cover for a 20x20 inches open area. This cover can be used on a wall mount or ceiling mount applications. It provides a 20x20 inches open area.

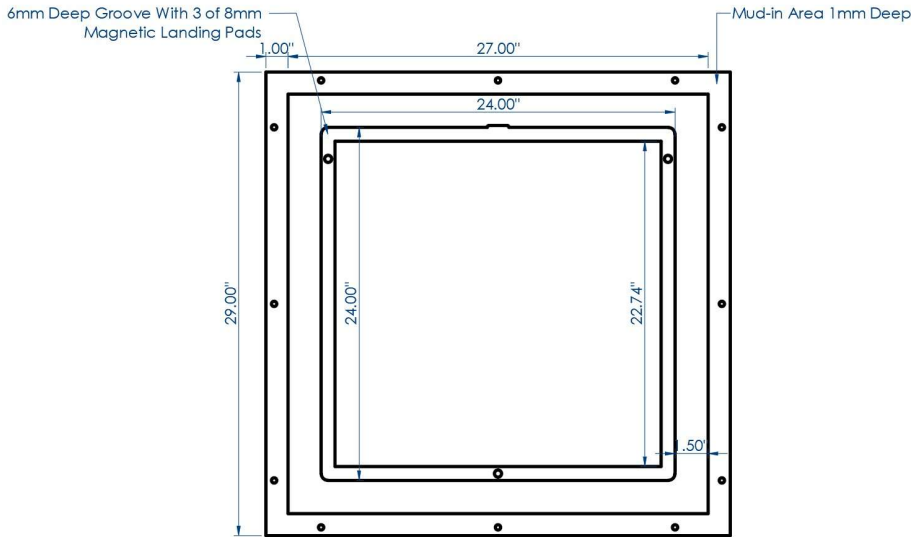

Product Dimensions

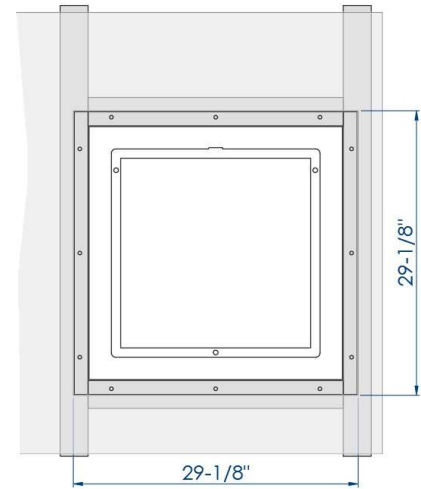

Suggested Drywall Opening

General dimensional data: $A=24"$; $B= A-5/8"-5/8"$; $C=A+3"$; $D=A+5"$

APPLICATION

- 1/2" and 5/8" optional drywall thickness available
- Suitable for both wall and ceiling installation
- Screws to wood/steel stud systems
- Tape and finish the seam as regular drywall process the pre-primed product can be painted to your wall color

FEATURES

- Magnetic removable access panel
- Pre-drilled screw guide hole at 4 sides
- CNC-routed mud-in area for easy installation
- Easy open with any flat screw drivers

PRODUCT SPECIFICATIONS

- 24"x24" open area and 22.74"x22.74" access-able
- Overall dimensions are 29" x 29" x 1/2" (736mm x 736mm x 12mm)
- Product weight is 4.80lbs (2.17Kg)

MATERIAL SPECIFICATIONS

- Raw material: Special formulated GFRP panel
- Density: $1.0 < D < 1.1 \text{ g/cm}^3$
- Asbestos content: 100% asbestos free
- Fire resistance: non-combustible
- Water absorptions: $\leq 40\%$
- Resistant Bending Strength: $\leq 18 \text{ Mpa dry}$
- Moisture Movement: 0.1%
- Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing